CONTROL LEVERS
MO 378-M

Technical Data

Technology	Contactless / Full redundant double die hall sensor
Angle Range	45° programmable (0.1° resolution)
Connector	6 way, Delphi Packard Metri Pack 150
Protection	Sensor IP6K9K sealed
Operating Temp.	-40 +85°C
Lifetime	2 Million cycles.
Supply Voltage	5V or 12-30V
Output	Programmable Outputs - Single/Dual Analog type: 0-5V / 0-10V / 4-20mA / PWM - Analog+IVS type: Analog + HighSide or LowSide Switch - CAN type: SAE J1939 / CANopen
Application	Tractors, yachts and off road vehicles
Options	Customized wire harness and output signal program Customized for different engine interfaces

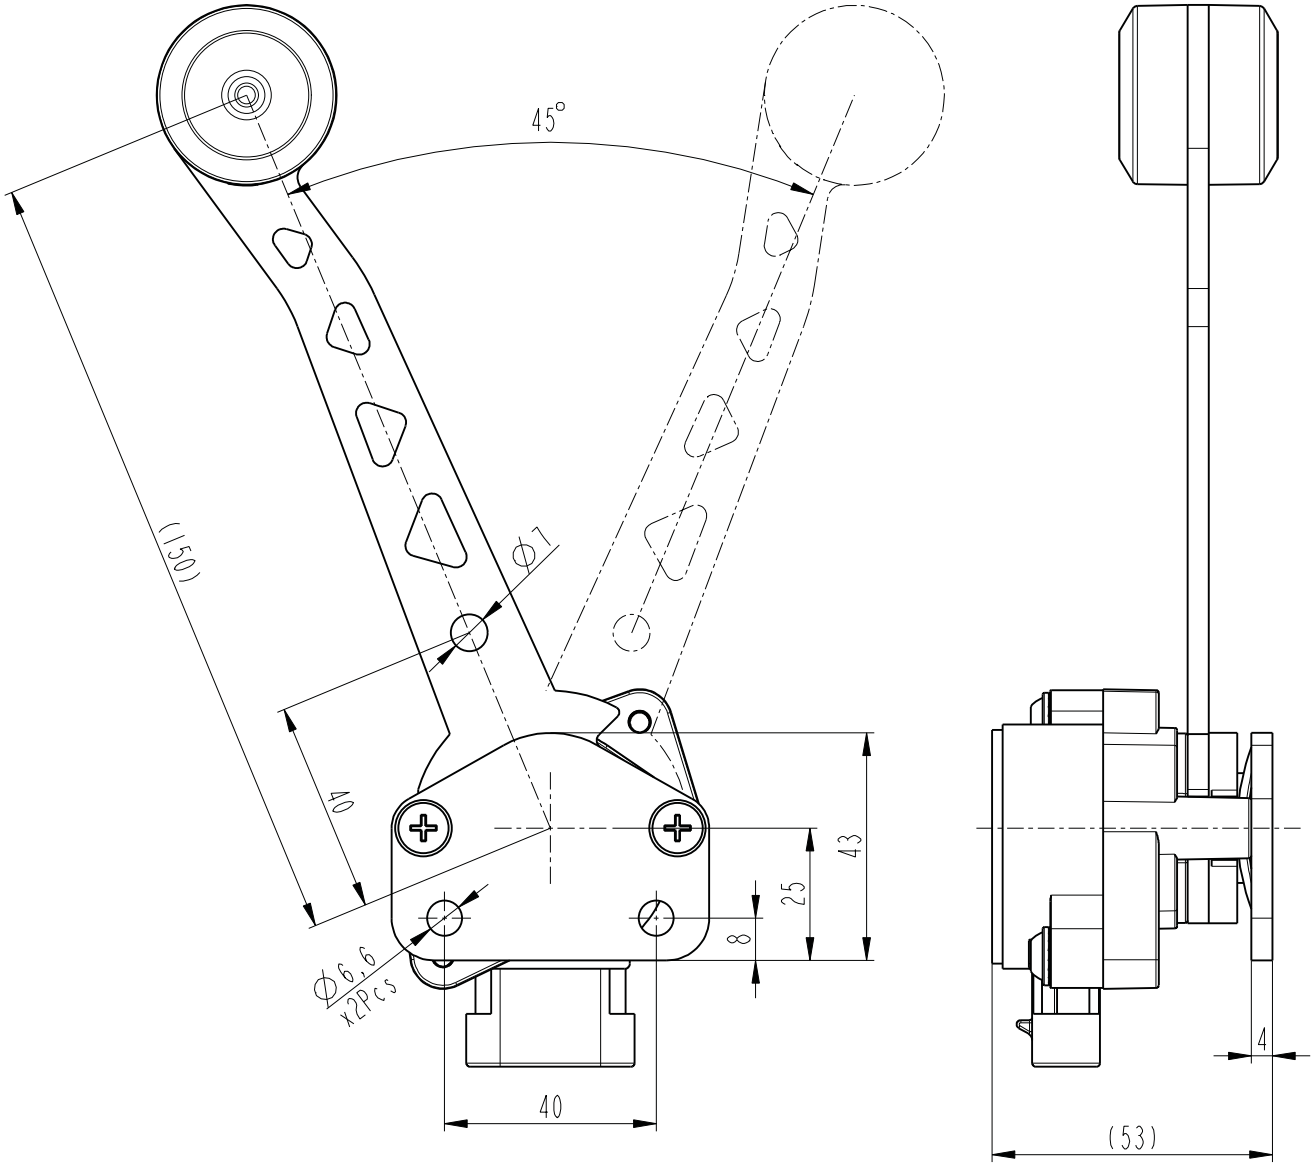

BAuB, Leidenhäuserstraße 2, 35305 Grünberg, GERMANY, TEL : ++49 6634-8105, MAIL: Weitzel.BAuB@t-online.de

Specifications are subject to change without notice